

RG-ES220GS-P

20-Port Gigabit Smart Cloud Managed PoE Switch



Highlights

- 20-port Gigabit Managed Switch with 16 PoE+ Ports, 2 RJ45 Ports, 2 SFP Ports
- Cost-effective smart cloud managed switches
- IP Camera Recognition, unique value for CCTV network
- Automatic Loop Prevention ensures service continuity
- Lifetime management on Ruijie Cloud at anytime anywhere

Highlight Features

RG-ES200 Series Switches

Gigabit access switch fits the needs in SMB network



802.3at / 802.3af




Abundant Application Scenarios



Centralized Cloud Management

Cost-Effective Smart Cloud Managed Switches

ES200 adopts a light-weighted Cloud management design, providing faster response to support richer features.

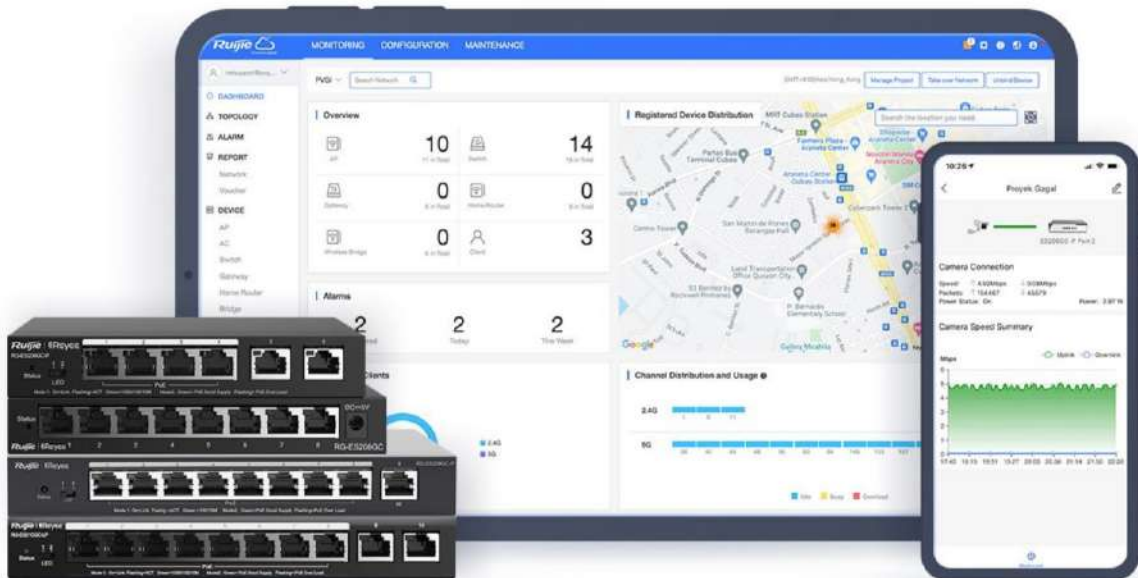

IP Camera/NVR recognition



Automatic Loop Prevention




Mobile VLAN Configuration



Intelligent PoE Adaptive

Highlight Features

Unique Value for CCTV Network

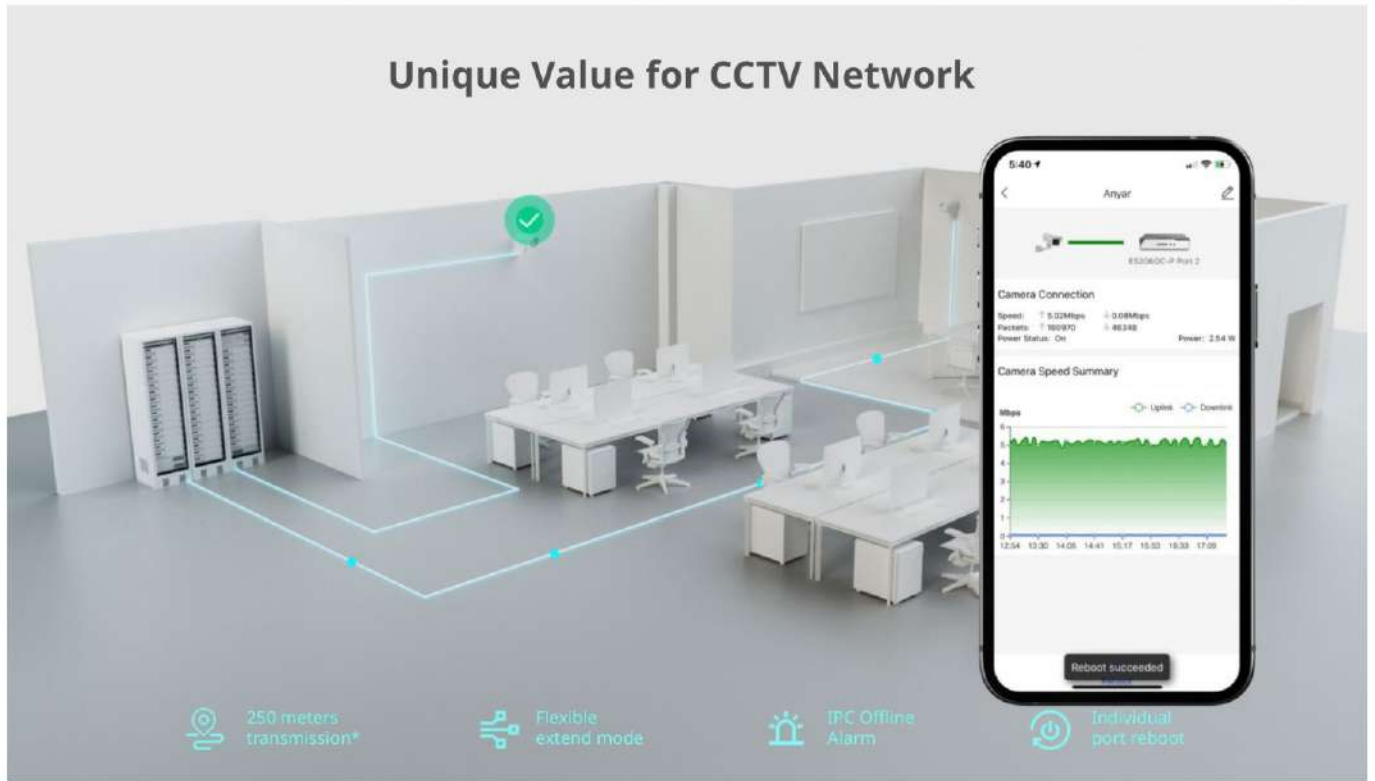

A 3D rendering of a modern office environment with a server rack on the left and several desks with chairs. A network diagram is overlaid on the scene, showing a central server rack connected to a switch, which then branches out to multiple cameras and other devices. A green checkmark icon is placed above the switch. To the right, a smartphone displays a monitoring application interface. The app shows a 'Camera Connection' section with statistics: Speed: 5.02Mbps (Up/Down), Packets: 100970 (Up/Down), Power Status: On, Power: 2.84 W. Below this is a 'Camera Speed Summary' graph showing Mbps over time. At the bottom of the app, a 'Reboot succeeded' notification is visible.

- 250 meters transmission*
- Flexible extend mode
- IPC Offline Alarm
- Individual port reboot

Automatic Loop Prevention Ensures Service Continuity

Network stays connected when network loop happens




A smartphone on the left displays a network management app interface. A notification bubble is overlaid on the screen, stating 'Loop Prevention Detects and prevents loops automatically.' with a toggle switch that is currently turned on. To the right, a network switch (Zygo Reyee RG-ES2050C-P) is shown with a camera and a square panel connected to it. The switch has several ports and a status LED. The background is dark blue.

Highlight Features

Cloud, Make Your Business Easy

- SON, zero touch provisioning to Cloud
- Configure VLANs on Ruijie Cloud APP
- Monitor switch statistics at anytime anywhere
- Easy maintenance, save onsite time and cost

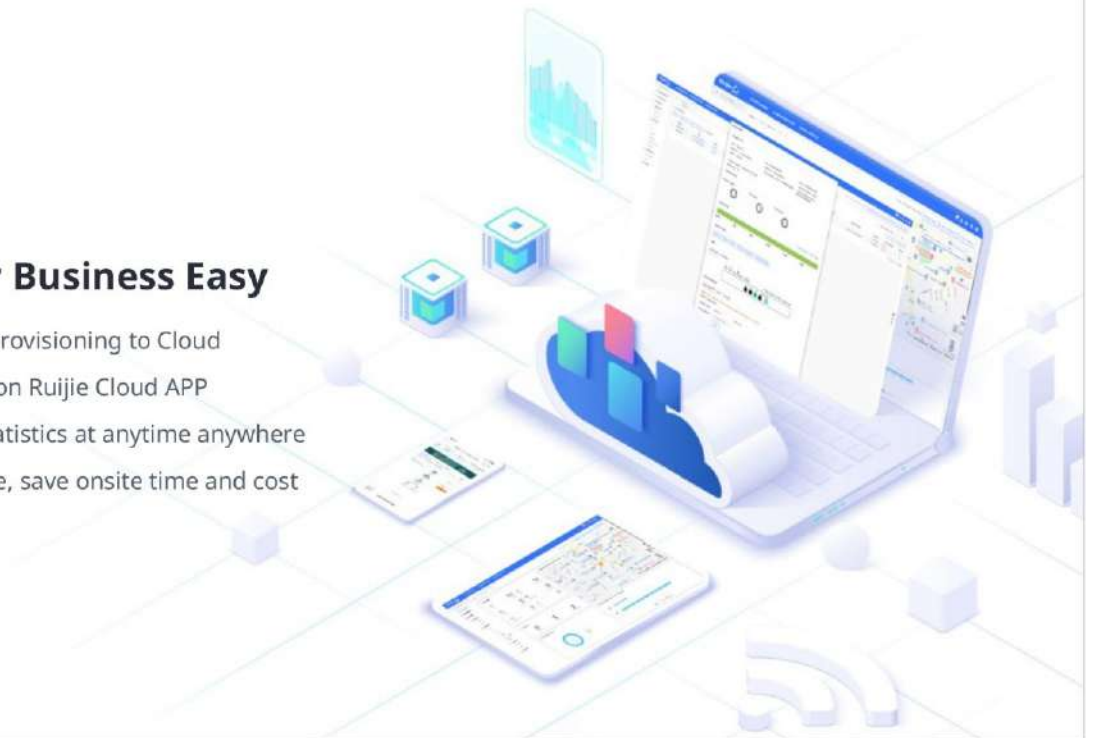

Product Information

Model	RG-ES220GS-P
Product Category	Layer 2

Hardware Specifications

Model	RG-ES220GS-P
Product Information	
Warranty	3 years
Port Specifications	
Total number of RJ45 ports	18
Total number of optical ports	2
Number of 1GE SFP ports	2
Number of 10/100/1000BASE-T ports	18
Reset button	1
Power Supply and Consumption	
PoE Out standard	PoE/PoE+ (IEEE 802.3af/at)
Number of PoE Out ports	16
Number of PoE/PoE+ Out ports	16
PoE budget	250 W
PoE power pins	1-2 (+), 3-6 (-)
Power input	220 V AC power supply: <ul style="list-style-type: none">• Rated input voltage: 100 V AC to 240 V AC, 50 Hz to 60 Hz• Maximum input voltage: 90 V AC to 264 V AC, 47 Hz to 63 Hz• Rated input current: 4.5 A
Maximum power consumption	15 W (with no PoE load) 265 W (with PoE full load)
Power supply	Fixed power supply
System Specifications	

Hardware Specifications

Model	RG-ES220GS-P
CPU	MAC chip, single-core processor, 500 MHz clock frequency
Flash memory	8 MB
Forwarding rate	29.7 Mpps
Switching capacity	40 Gbps(bit/s)
Dimensions and Weight	
Casing	Metal
Product dimensions (W x D x H)	300 mm x 223 mm x 43.6 mm (11.81 in. x 8.78 in. x 1.72 in.)
Weight	2.12 kg (4.67 lbs) (without packaging materials) 2.80 kg (6.17 lbs) (with packaging materials)
Shipping weight	2.80 kg (6.17 lbs)
Environment and Reliability	
Fan	1 x fixed fan
Cooling	Air cooling, left-to-right airflow
Acoustic noise	< 40 dB: 25°C(77°F)
Mounting options	Rack
Hot swapping of cables	Hot swapping supported by the service port and power connector
MTBF	200,000 hours
Operating temperature	0°C to 40°C (32°F to 104°F)
Storage temperature	-40°C to +70°C (-40°F to +158°F)
Operating humidity	10% RH to 90% RH (non-condensing)
Storage humidity	5% RH to 95% RH (non-condensing)
Altitude	-500 m to +5,000 m (-1,640.42 ft. to +16,404.20 ft.)
ESD protection	Air discharge: 8 kV Contact discharge: 6 kV
Surge protection	Service port: ±4 kV for common mode Power connector: ±6 kV for common mode and ±6 kV for differential mode

/ Hardware Specifications

Model	RG-ES220GS-P
Certification and Regulatory Compliance	
EMC	EN 55032 EN 61000-3-2 EN 61000-3-3 EN 55035 EN 300 386
Safety compliance	EN 62638-1
Certification	CE, FCC

Software Specifications

Model	RG-ES220GS-P
Authentication	
RADIUS	No
802.1X authentication	No
Basic Configurations	
PoE watchdog	Yes
Online upgrade	Yes
Ethernet Switching	
Maximum number of VLANs	16
Maximum number of MAC address entries	8000
Interface flow control	Yes
IEEE 802.1Q VLAN	Yes
VLAN configuration supported on LAN ports	Yes
LLDP	No
LLDP-MED	No
Static MAC address	Yes
Static aggregation	No
LACP	No
Inbound or outbound rate limiting based on interface traffic	Yes
Gateway Features	
802.1p priority-based traffic classification	No
DSCP priority-based traffic classification	No
Interface	

Software Specifications

Model	RG-ES220GS-P
Jumbo frame length (MTU)	10000 bytes
EEE	Yes
Cable test	Yes
IP Routing	
IPv4 static route	No
IPv6 static route	No
OSPFv2	No
OSPFv3	No
IP Service	
ARP	No
IPv4 ping	No
IPv4 traceroute	No
ICMPv6	No
IPv6 ping	No
IPv6 traceroute	No
DNS client	Yes
DHCP client	Yes
Multicast	
IGMPv1 snooping	No
IGMPv2 snooping	No
Basic IGMPv3 snooping	No
Full IGMPv3 snooping	No
IGMP filtering	No
IGMPv1, v2, and v3	No

Software Specifications

Model	RG-ES220GS-P
Network Management and Monitoring	
Fan speed adjustment	Automatic speed adjustment
Mirroring	Yes
HTTP login	Yes
HTTPS login	No
SON	Yes
Syslog	No
Camera detection	Yes
eWeb management	Yes
Ruijie Cloud management	Yes
Ruijie Reyee App management	Yes
SNMPv1, v2c, and v3	No
Security	
Port isolation	Yes
Broadcast storm control	Yes
Multicast storm control	Yes
Unknown unicast storm control	Yes
DHCP snooping	Yes
Standard ACL	No
Extended MAC ACL	No
Extended IP ACL	No
IPv6 ACL	No
ARP anti-spoofing	No
CPU Protection Policy	Yes

Software Specifications

Model	RG-ES220GS-P
System Performance Capacity	
Recommended camera limit	200W H265: 80 400W H265: 40

Package Contents

Model	RG-ES220GS-P
Device	
Device	1
Accessories	
Rubber pad	4
Power cord retention clip	1
Screw	6 X M3 x 6 mm cross recessed countersunk head screws
Power cord	1 x 1.8 m (5.91 ft.)
Rack-mount bracket	2
Manual	
User Manual	1
Warranty Card	1

Ruijie | ReYee

 **R**edefine your **e**asy network



Ruijie Networks Co., Ltd.

Official Website: <https://Reyee.Ruijie.com>