

Illuminated RTE Plates Slim-line

SD-7103GC-PEQ *Stainless steel plate*

SD-7103GC-PTQ *Stainless steel plate with timer*

Features:

- Square illuminated push button with caption "PUSH TO EXIT"
- Message language can be easily changed in the field to Spanish or French
- CE and UL approved switch is rubber-sealed to prevent liquid penetration
- Includes stainless-steel slimline plate - Dimensions: 4 1/2"x1 1/2"x1 15/16" (114x38x49 mm)
- Includes six colored 12-inch wire leads with easy-to-attach spade lugs for fast installation
- Long-life green LED 12/24 VAC/VDC (Approx. 35,000 hrs)
- Weather resistant when properly installed

SD-7103GC-PEQ Includes:

- Momentary switch, DPST, NO/NC contacts rated 5A@24VAC max.

SD-7103GC-PTQ Includes:

- Timed output from 1~180 s
- SPDT Switch rated 3A@24VDC
- Buzzer output for audio status




SD-7103GC-PEQ




SD-7103GC-PTQ

Wiring Diagram:

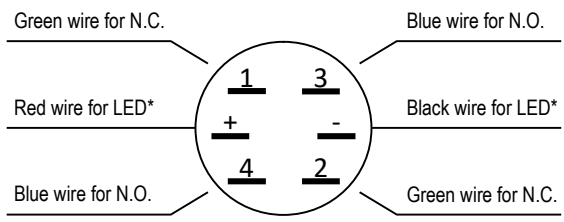

Timer (SD-7103GC-PTQ only):

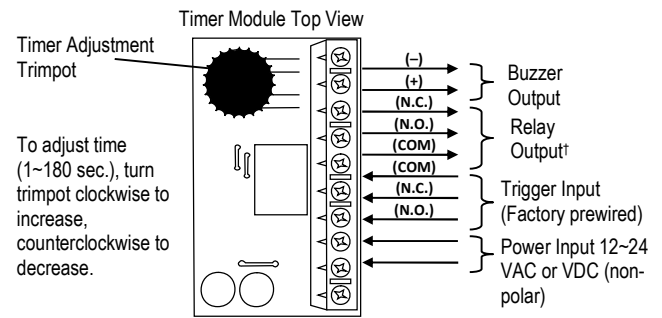

NOTE: Terminal legend can be found on back of PCB.
 †Relay rated 3A@24VDC

*IMPORTANT: For 24VDC operation, use the included 680Ω, 0.5W resistor in line with the red wire or the black wire.