

Surface-Mount Wide-Gap Contacts

Please visit the SECO-LARM website www.seco-larm.com for complete installation instructions.

Please read the manual before you begin the installation.



SM-216Q/GY

2³/₄" (70mm) Gap, Closed Loop, Screw Terminals, Gray

SM-216Q/BR

2³/₄" (70mm) Gap, Closed Loop, Screw Terminals, Brown



SM-216Q/GY shown

Features:

- Wide gap for loose-fitting doors and windows
- Surface-mount magnetic contacts
- Screw mount
- ABS plastic case has integrated mounting holes
- Contact reed switch is SPST, deactivated rhodium on gold underplating for a longer expected life
- For closed loop circuits
- 2³/₄" (70mm) Gap
- Spacers included
- Lifetime limited warranty



Gold-Plated Contacts

Alnico 5 Magnet


Screw Terminals

2³/₄" Gap

Specifications:

Model number		SM-216Q/GY	SM-216Q/BR
Loop type		Closed loop	
Electrical configuration		N.O. (SPST)	
Operation gap		2 ³ / ₄ " (70mm)	
Connectors		Screw terminals	
Color		Gray	Brown
Material	Case	High-impact ABS plastic	
	Contacts	Deactivated rhodium on gold underplating	
Contact rating		1.0A@10VDC (max.)	
		10W (max.)	
Operating voltage		12~24 VDC	
Temperature		-15°~160° F (-25°~70° C)	
Switch cycles		50 Million (0.1mA@5VDC)	
Switch dimensions		3 ¹⁵ / ₁₆ "x ⁹ / ₁₆ "x ¹ / ₂ " (100x14x13 mm)	
Magnet dimensions		3 ¹⁵ / ₁₆ "x ⁹ / ₁₆ "x ¹ / ₂ " (100x14x13 mm)	
Magnet type		Alnico 5	

Dimensions:

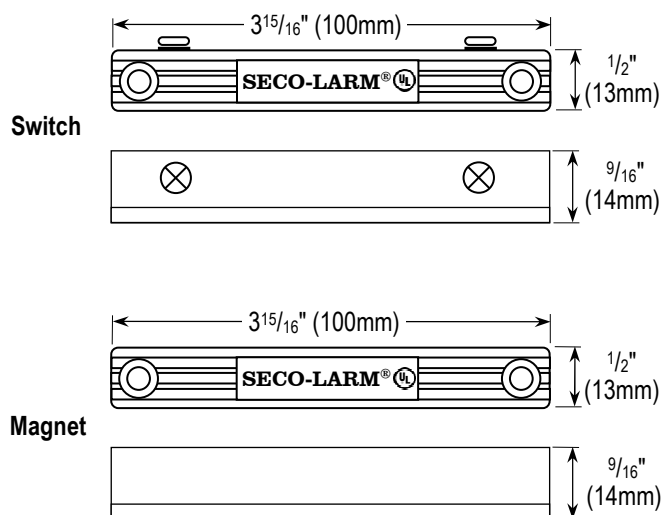

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



Copyright © 2019 SECO-LARM U.S.A., Inc. All rights reserved.
All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners.
The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI®

Order Part# 763-216% PI_SM-216Q_190625_ML.docx

Superficie de Montaje Contactos Magnéticos Amplia Brecha

Por favor visite el sitio web de SECO-LARM www.seco-larm.com para obtener instrucciones de instalación completas. Por favor lea el manual antes de usar el equipo.

SM-216Q/GY

2³/₄" (70mm) Brecha, Lazo Cerrado, Terminales de Tornillo, Gris

SM-216Q/BR

2³/₄" (70mm) Brecha, Lazo Cerrado, Terminales de Tornillo, Café

Características:

- Amplio hueco para puertas y ventanas sueltas
- Contactos magnéticos de montaje superficial
- Montaje de tornillo
- Caja de plástico ABS con orificios de montaje integrados
- El interruptor de lengüeta de contacto es SPST, rodio desactivado en la capa inferior de oro para una vida útil más larga
- Para circuitos cerrados
- Brecha de 2³/₄" (70mm)
- Espaciadores incluidos
- Garantía limitada de por vida



Contacto Chapado en Oro

Imán Alnico 5

Tornillo Terminal

Brecha de 2³/₄"




Se muestra SM-216Q/GY

Especificaciones:

Modelo		SM-216Q/GY	SM-216Q/BR
Tipo de Circuito		Lazo Cerrado	
Configuración eléctrica		N.A. (SPST)	
Brecha de Operación		2 ³ / ₄ " (70mm)	
Conectores		Terminales tipo tornillo	
Color		Gris	Café
Material	Caja	Plástico ABS de alto impacto	
	Contactos	Rodio desactivado en chapado de oro	
Puntuación de contactos		1.0A@10VCC (max)	
		10W (max)	
Voltaje operando		12~24 VCC	
Temperatura		-15°~160°F (-25°~70°C)	
Ciclos de Conmutación		50 millones (0.1mA@5VCC)	
Dimensiones del Interruptor		3 ¹⁵ / ₁₆ "x ⁹ / ₁₆ "x ¹ / ₂ " (100x14x13mm)	
Dimensiones del Imán		3 ¹⁵ / ₁₆ "x ⁹ / ₁₆ "x ¹ / ₂ " (100x14x13mm)	
Tipo de Imán		Alnico 5	

Dimensiones:

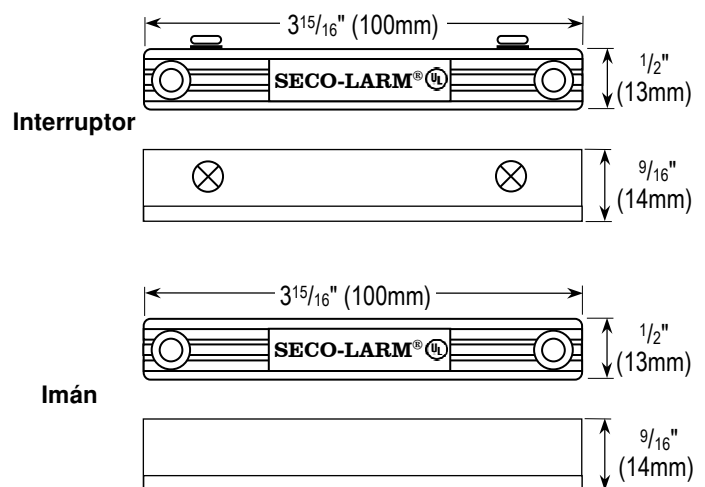

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



Copyright © 2019 SECO-LARM U.S.A., Inc. Todos los derechos reservados. Todas las marcas comerciales son propiedad de SECO-LARM U.S.A., Inc. o sus respectivos propietarios. La póliza de SECO-LARM es de desarrollo y mejora continua. Por esa razón, SECO-LARM se reserva el derecho de cambiar las especificaciones y los precios sin previo aviso. SECO-LARM tampoco es responsable de errores de impresión.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI® 

Order Part# 763-216% PI_SM-216Q_190625_ML.docx