



Security

Concealed-Terminal Adhesive Surface-Mount

Please visit the SECO-LARM website www.seco-larm.com for complete installation instructions.

Please read the manual before you begin the installation.

SM-433-TQ/W

1 1/4" (31mm) Gap, Closed Loop,
Screw Terminals, White

SM-433-TQ/B

1 1/4" (31mm) Gap, Closed Loop,
Screw Terminals, Brown

Features:

- Surface-mount magnetic contacts
- Adhesive mount
- Gold-plated terminals for longer expected life and reliability
- Screw terminals
- Cover hides mounting screws, terminal block, and wires
- Contact reed switch is SPST, iridium-plated to have a high melting point and Vickers hardness for higher power handling and longer expected life
- For closed loop circuits
- 1 1/4" (31mm) Gap
- Double-sided tape included
- Lifetime limited warranty



SM-433-TQ/W shown



Iridium
Plated
Contacts

Rare
Earth
Magnet


Screw
Terminals

1 1/4"
Gap

Specifications:

Model		SM-433-TQ/W	SM-433-TQ/B
Loop type		Closed loop	
Electrical configuration		N.O. (SPST)	
Connectors		Gold-plated screw terminals	
Color		White	Brown
Mounting		Adhesive tape	
Material	Case	High-impact ABS plastic	
	Contacts	Iridium-plated	
Contact rating		1.0A@10VDC (max.)	
		10W (max.)	
Operating temperature		-15°~160° F (-25°~70° C)	
Switch cycles		50 Million (0.1mA@5VDC)	
Switch dimensions		2"x9/16"x1 1/2" (51x14x13 mm)	
Magnet dimensions		2"x9/16"x1 1/2" (51x14x13 mm)	
Magnet type		Rare-earth neodymium	

Dimensions:

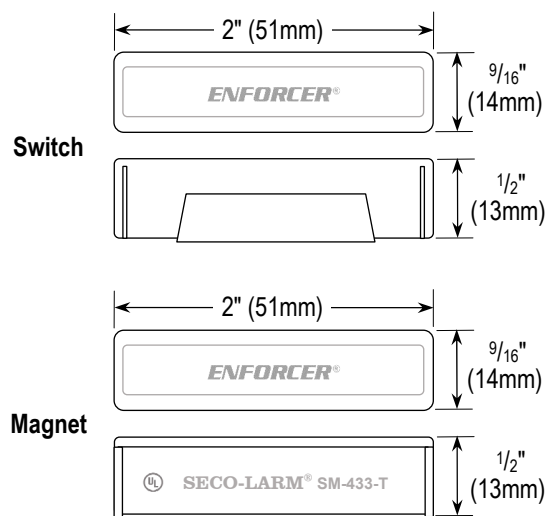

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



Copyright © 2019 SECO-LARM U.S.A., Inc. All rights reserved.
All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners.
The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI®

PI_SM-433-TQx_190621_ML.docx

Montaje Superficial Adhesivo de Terminal Oculta

Por favor visite el sitio web de SECO-LARM www.seco-larm.com para obtener instrucciones de instalacion completas.

Por favor lea el manual antes de usar el equipo.

SM-433-TQ/W

1 1/4" (31 mm) Brecha, Circuito Cerrado,
Terminales de Tornillo, Blanco

SM-433-TQ/B

1 1/4" (31mm) Brecha, Circuito Cerrado,
Terminales de Tornillo, Marrón

Características:

- Contactos magnéticos de montaje en superficie
- Montaje adhesivo
- Terminales chapados en oro para una vida útil y confiabilidad más prolongadas
- Terminales de tornillo
- La cubierta oculta los tornillos de montaje, el bloque de terminales y los cables.
- Interruptor de un solo polo tiro doble, chapado en iridio para tener un alto punto de fusión y dureza Vickers para un mayor manejo de la potencia y una vida útil más larga
- Para circuitos cerrados.
- 1 1/4" (31mm) brecha
- Incluye cinta de doble faz
- Garantía limitada de por vida



SM-433-TQ/W mostrado



Contatos chapados en iridio

Imán de tierra poco común


Terminales de Tornillo

1 1/4" Brecha

Especificaciones:

Modelo	SM-433-TQ/W	SM-433-TQ/B
Tipo de Circuito	Circuito Cerrado	
Configuracion electrica	N.O. (SPTD)	
Conectores	Terminales de tornillo dorados	
Color	Blanco	Marrón
Montaje	Cinta Adhesiva	
Material	Cubierta	Plástico ABS de alto impacto
	Contactos	Chapado en iridio
Puntuación de contactos	1.0A@10V C.C. (max.)	
	10W (max.)	
Temperatura de funcionamiento	-15°~160° F (-25°~70° C)	
Ciclos de cambio	50 Millones (0.1mA@5V C.C.)	
Dimensiones del interruptor	2"x9/16"x1 1/2" (51x14x13 mm)	
Dimensiones del imán	2"x9/16"x1 1/2" (51x14x13 mm)	
Tipo de imán	Imán Neodimio de tierra poco común	

Dimensiones:

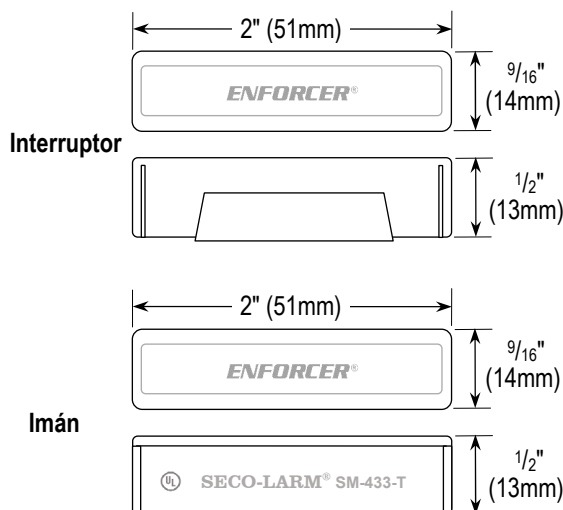

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



Copyright © 2019 SECO-LARM U.S.A., Inc. Todos los derechos reservados.
Todas las marcas comerciales son propiedad de SECO-LARM U.S.A., Inc. o sus respectivos propietarios.
La póliza de SECO-LARM es de desarrollo y mejora continua. Por esa razón, SECO-LARM se reserva el derecho de cambiar las especificaciones y los precios sin previo aviso. SECO-LARM tampoco es responsable de errores de impresión.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI®

PI_SM-433-TQx_190621_ML.docx